FEATURES

Built-in Magnetic Contactors allow the use of standard pressure switches, prolong switch life and eliminate the need to source and install separate contactors, saving installation time and reducing total system component costs.

Voltage Relay for installer convenience

230 volt standard models

Start Capacitors for starting torque

Run Capacitors for efficiency and quiet operation

Type N3R enclosure for indoor or outdoor mounting

Multiple knockouts and two ground terminals

Manual reset overload circuit breakers

AGENCY LISTINGS



TESTED TO UL AND CSA STANDARDS BY UL.

Magnetic Contactor 10 Control Boxes

FOR 6", 5 - 15 HP CENTRIPRO SUBMERSIBLE MOTORS



CONTROL BOXES FOR 6" CENTRIPRO (HITACHI) SINGLE PHASE MOTORS*

| Control Box | Use On | | | Capacitor Ratings (MFD) | | Contactor | Overload | Enclosure | Shipping |
|---------------|-----------|-----|-------|-----------------------------|---------------|-----------|-----------------|----------------|-------------|
| Order Number | Motor No. | HP | Volts | Start Caps | Run Caps | Rating | Circuit Breaker | Dimensions | Wt. (lbs.). |
| CB05MC3R | 6M051 | 5 | 230 | 189-227uf / 330V | 30 / 440V | 30A | 30A | 12.5" H x | 15 |
| CB07MC3R | 6M071 | 7.5 | 230 | 243 - 292 / 330V | 40 / 440V | 50A | 50A | 11" W x 6.7" D | 13 |
| CB10MC3R | 6M101 | 10 | 230 | (Qty 2) 161 - 193 / 330V | (2) 25 / 440V | 70A | 70A | 17.5" H x | 27 |
| CB15MC3R | 6M151 | 15 | 230 | (Qty 2) 216 - 260 / 330V | (2) 35 / 440V | 90A | 90A | 11" W x 6.7" D | 27 |
| CB15MC3R100 ① | | | | | | | 100A | | |

① Overload circuit breaker is rated at 100 amps versus 90 amp standard in CB15MC. Use in areas with high ambient temperatures to reduce nuisance tripping.

5 AND 7.5 HP WIRING DIAGRAM

BLK START CAPACITOR CAPACITOR 5 RELAY RED ORG RED BLK BLK BLK ØØ BLK | YEL RED TO LINE POWER PRESSURE FROM TWO POLE MOTOR OR OTHER **FUSED SWITCH**


CONTROL

SWITCH

OR CIRCUIT

BREAKER

10 AND 15 HP WIRING DIAGRAM

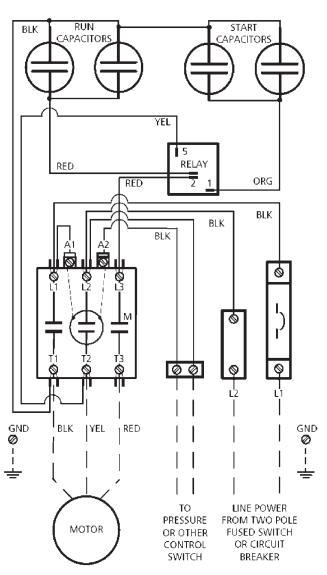


^{*} Use these control boxes on only CentriPro (Hitachi) motors. Franklin Electric control boxes will not work and will void the CentriPro warranty.

Do not use these control boxes on Franklin Electric 6" motors as the overloads and capacitors are not the same as used by FE, using these will void FE's warranty.


6" MOTOR CONTROL BOX PART LIST


| Order No. | Part Description | Where Used | | |
|-----------|-------------------------------------|----------------------------|--|--|
| 9K580 | General Electric Relay # 3ARR22J4A3 | ALL | | |
| 9K581 | Run Capacitor 35uF at 450V | CB15MC3R & CB15MC3R100 | | |
| 9K582 | Start Capacitor 216-260uF at 330V | CBISIVICSK & CBISIVICSKIUU | | |
| 9K608 | Start Capacitor 161-193uf at 330VAC | CB10MC3R | | |
| 9K609 | Start Capacitor 243-292uf at 330VAC | CB07MC3R | | |
| 9K610 | Start Capacitor 189-227uf at 330VAC | CB05MC3R | | |
| 9K611 | Run Capacitor 25uf at 450VAC | CB10MC3R | | |
| 9K612 | Run Capacitor 40uf at 450VAC | CB07MC3R | | |
| 9K613 | Run Capacitor 30uf at 450VAC | CB05MC3R | | |
| 9K614 | DP Mag Contactor 90 FLA, 3 pole | CB15MC3R & CB15MC3R100 | | |
| 9K615 | DP Mag Contactor 75 FLA, 3 pole | CB10MC3R | | |
| 9K616 | DP Mag Contactor 50 FLA, 3 pole | CB07MC3R | | |
| 9K617 | DP Mag Contactor 30 FLA, 3 pole | CB05MC3R | | |
| 9K618 | Circuit Breaker 100A | CB15MC3R100 | | |
| 9K619 | Circuit Breaker 90A | CB15MC3R | | |
| 9K620 | Circuit Breaker 60A | CB10MC3R | | |
| 9K621 | Circuit Breaker 50A | CB07MC3R | | |
| 9K622 | Circuit Breaker 30A | CB05MC3R | | |

5 AND 7.5 HP DIMENSIONS

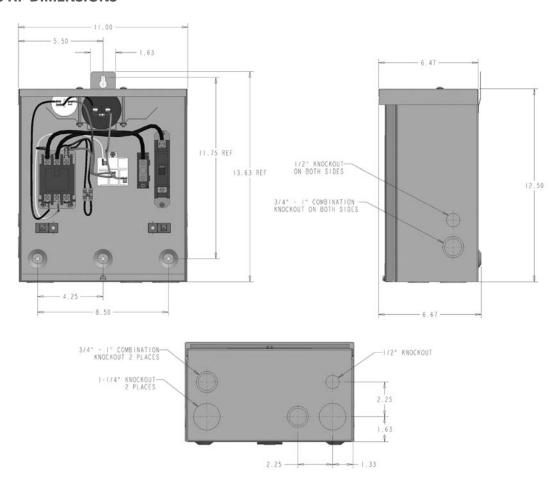

10 AND 15 HP DIMENSIONS

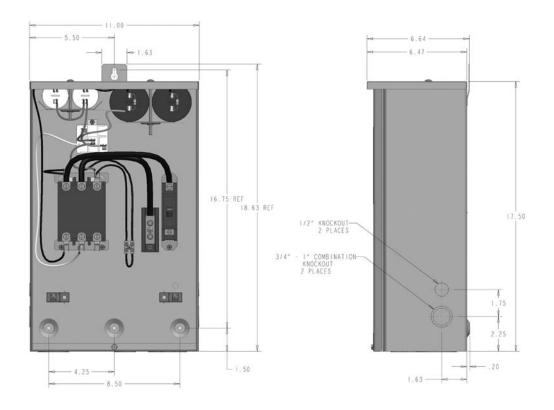

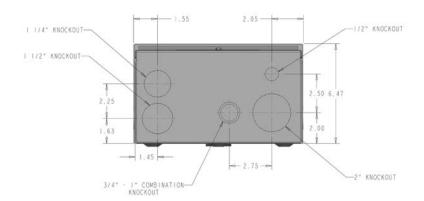



Xylem Inc.

2881 East Bayard Street Ext., Suite A

Seneca Falls, NY 13148 Phone: (866) 325-4210

Fax: (888) 322-5877 www.centripro.com

CentriPro is a trademark of Xylem Inc. or one of its subsidiaries. © 2012 Xylem Inc. BC6CBOX R3 June 2013