

Utility Pumps

5 Series 1/6 HP Submersible



WATER WIZARD®

Applications

- Commercial, industrial and home uses where liquid must be transferred or recirculated

Features

- 1/6 hp shaded pole motor with overload protection
- Designed for continuous duty
- Pumps down to 1/8" (38 mm)
- Garden hose adapter
- Removable inlet screen for easy cleaning
- Epoxy coated cast aluminum housing
- Viton® shaft seal
- Multiple switch options for automatic operation
- Multiple power cord lengths available

Series Specifications

Capacity: 1200 gph @ 1'
(4542 lph @ .3 m)

Shut Off: 26' (8 m)

Liquid Temperature: 120 °F (49 °C)


Discharge: 1" FNPT (25.4 mm)

Impeller: Nylon

Electrical: 115 V, 60 Hz
230 V, 60 Hz

Operation: Automatic or manual

Performance Curve

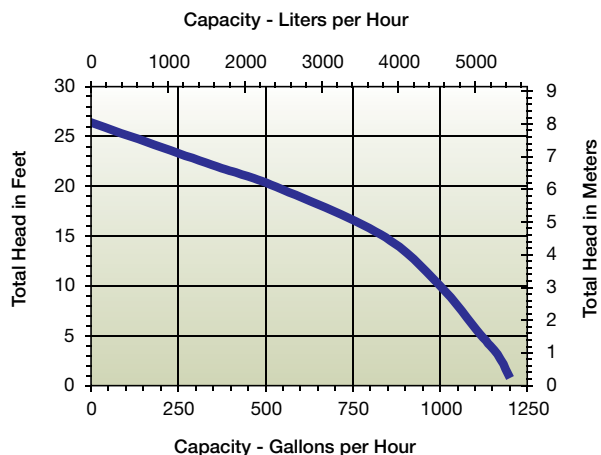

Model Characteristics

Item #	Model	Volts	Cord	Listing	On Level	Off Level
505300	5-ASP	115	10' 3 m	cCSAus	6" - 9" 15.2 cm - 23 cm	1" - 4" 2.5 cm - 10.2 cm
505350	5-ASP-LL	115	18' 5.5 m	cCSAus	2" - 3" 5 cm - 7.6 cm	.5" - 1.5" 1.27 cm - 3.8 cm
505400	5-ASP-FS	115	10' 3 m	cCSAus	11" 28 cm	3" 7.6 cm
505486	5-MSPR	115	10' 3 m	cCSAus	-	-
505000	5-MSP	115	10' 3 m	cCSAus	-	-
505025	5-MSP	115	25' 7.6 m	cCSAus	-	-
505176	5-MSP	115	18' 5.5 m	cCSAus	-	-
505202	5-MSP	230	12' 3.6 m	-	-	-