

# Wastewater

## FLS-400 Series



### Applications


- Portable submersible pump for general construction dewatering.

### Features

- Permanent split capacitor (PSC) motor with thermal overload protection. Upper and lower permanently lubricated ball bearings for reliability
- Corrosion-resistant stainless steel motor shaft
- Stainless steel shell and suction strainer
- 2" NPT discharge
- Double mechanical seals (lower - silicon carbide, upper - carbon on ceramic)
- Urethane rubber semi-vortex impeller for maximum durability
- 20' power cord sealed at motor housing

## Engineering Data


\*Dimensions measured in inches [mm]

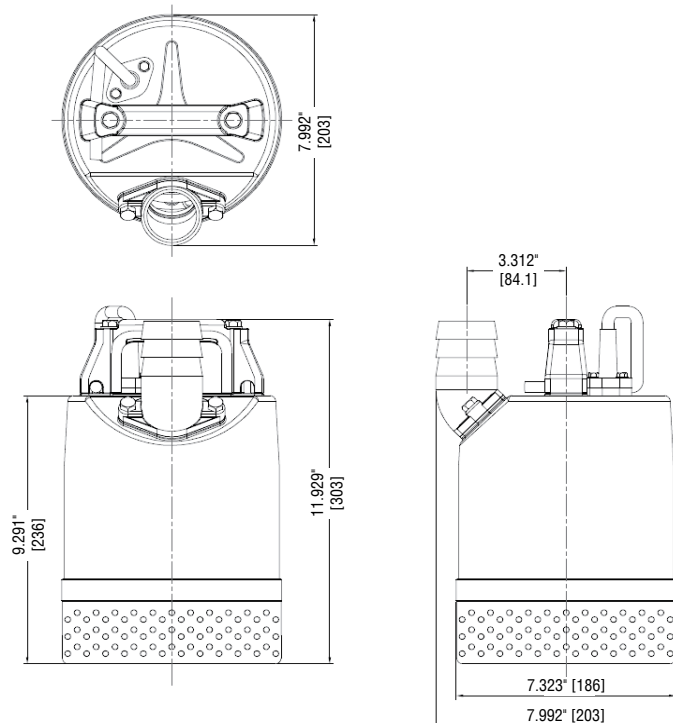

## Specifications

| Item No. | Model No. | Listing | HP  | Volts | FLA | PH. | RPM  | Discharge | Performance (gpm @ head) |     |     |     | Shut-Off Head (ft) | Cord Length (ft) | Switch | Ship Wt. (lbs) |
|----------|-----------|---------|-----|-------|-----|-----|------|-----------|--------------------------|-----|-----|-----|--------------------|------------------|--------|----------------|
|          |           |         |     |       |     |     |      |           | 4'                       | 10' | 20' | 30' |                    |                  |        |                |
| 620240   | FLS-400   | cCSAus  | 1/2 | 115   | 5   | 1   | 3450 | 2" NPT    | 60                       | 54  | 42  | 20  | 37                 | 20               | Manual | 24             |

## Performance Data

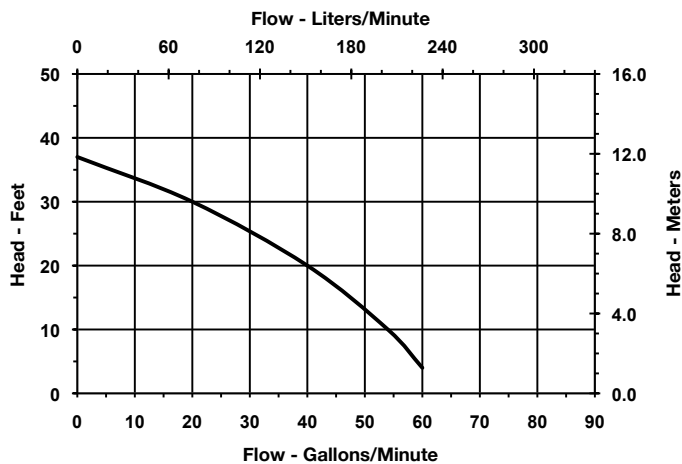

**Franklin Electric**

P.O. Box 12010  
Oklahoma City, OK 73157-2010  
Phone: 1.800.701.7894  
Fax: 1.800.678.7867  
www.LittleGiantPump.com



©2011 Franklin Electric Co., Inc.  
Little Giant® is a registered trademark of Franklin Electric Co., Inc.  
Form 996165 — 05/11