

Wastewater

FS-750 Series



Applications


- Portable submersible pump for general construction dewatering.

Features

- 1 hp permanent split capacitor (PSC) motor, with thermal overload protection. Upper and lower permanently lubricated ball bearings for reliability
- Stainless steel for corrosion-resistant motor shaft
- Stainless outer shell, motor cover, motor casing and suction strainer
- Dynamically balanced ductile iron impeller
- 2" hose barb discharge
- Double mechanical seals (lower - silicon carbide on silicon carbide, upper - carbon on ceramic)
- 20' power cord sealed at motor housing

LittleGIANT®

Engineering Data

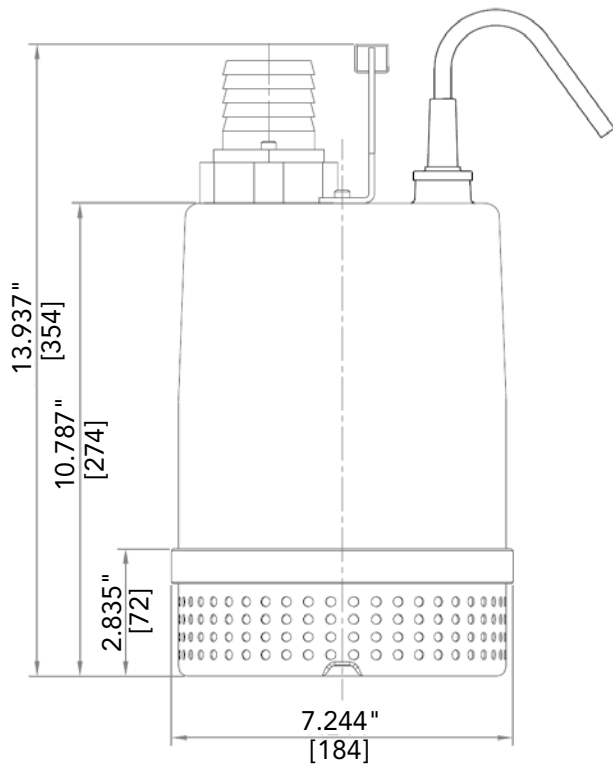


*Dimensions measured in inches [mm]

Specifications

Item No.	Model No.	HP	Volts	FLA	PH.	RPM	Discharge	Performance (gpm @ head)					Shut-Off Head (ft)	Cord Length (ft)	Switch	Ship Wt. (lbs)
								5'	10'	20'	30'	40'				
620241	FS-750	1	115	10	1	3450	2"	80	76	68	54	38	52	20	Manual	35

Performance Data

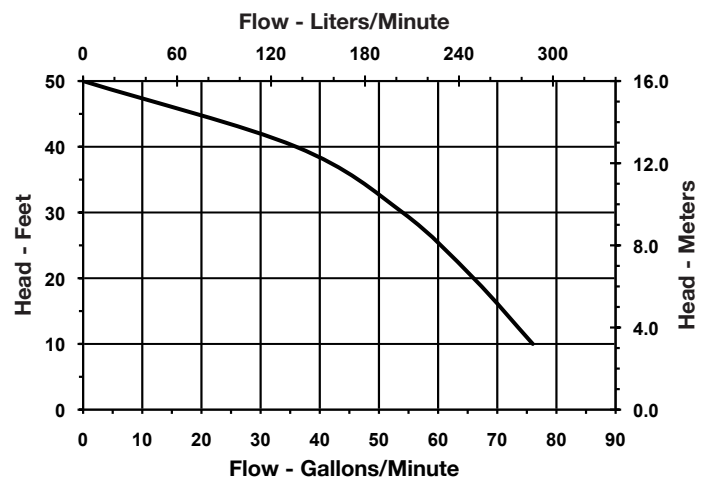

Franklin Electric

P.O. Box 12010
Oklahoma City, OK 73157-2010
Phone: 1.800.701.7894
Fax: 1.800.678.7867
www.LittleGiantPump.com



©2011 Franklin Electric Co., Inc.
Little Giant® is a registered trademark of Franklin Electric Co., Inc.
Form 996168 — 05/11