

Grinder Retrofit Kit



Applications

- Direct simplex replacement grinder for positive displacement grinder systems

Features

- Fast, simple and easy installation
- Epoxy coated steel cover
- 1-1/4" NPT piping
- Includes water-tight junction box for ease of installation, 1 - 1/4" cast iron anti-siphon / check valve, 2 hp 3450 rpm automatic grinder pump with mechanical float switch
- Adjustable alarm float switch preset at factory
- Quick disconnect plug

Series Specifications

Capacity: 31 gpm @ 40' (117 lpm @ 12.19 m)

Shut Off: 130' (37 m)


Liquid Temperature: 140 °F (60 °C)

Cutter System: Hardened stainless steel

Electrical: 230 V, 60 Hz

Operation: Automatic

Performance Curve

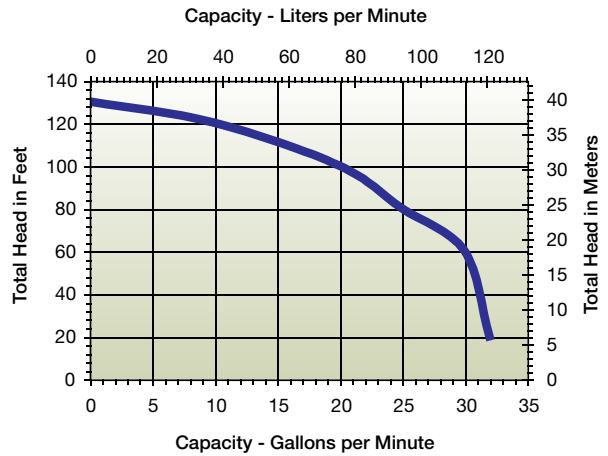

Model Characteristics

Item #	Model	HP	Volts	Phase	Full Load Amps/Watts	Switch
520835	GP-A-RFK	2	230	1	13.9 3200	Piggyback Mechanical Float