

Wastewater

SP25A Series



163025
C  US
CSA 108
UL 778

Applications



- Automatic utility pump ideal for dewatering and water transfer.

Features

- ¼ hp, 115 Volt, thermal overload protected. 3.2 full load Amps. 10' power cord. Stainless steel heat treated shaft. Continuous duty "oil free" motor. Permanently lubricated lip seal
- Corrosion-resistant aluminum pump casing for superior heat dissipation. 1¼" NPT discharge
- Built-in suction strainer to eliminate internal damage from possible debris. Removable filter screen for easy cleaning
- Impeller constructed of durable glass reinforced thermoplastic
- Automatic, mechanical float switch
 - On Level 13.4" [340mm]
 - Off Level 7.5" [190mm]
- 10' power cord

LittleGIANT®

Engineering Data

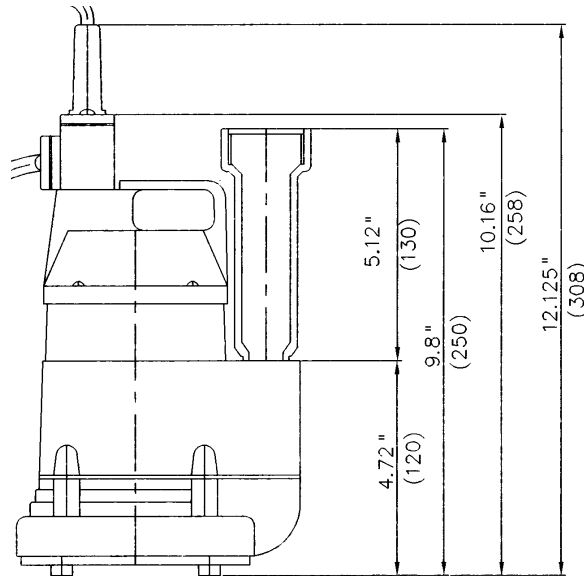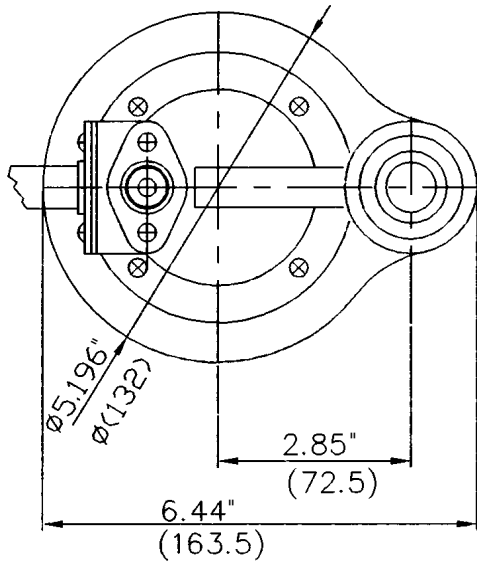


*Dimensions measured in inches [mm]

Specifications

Item No.	Model No.	Listing	HP	Volts	Discharge	Performance (gpm @ head)			Shut-Off Head (ft)	Cord Length (ft)	Ship Wt. (lbs)
						5'	10'	15'			
620136	SP25A	cCSAus	1/4	115	1-1/4"	24	19	12	21	10	8.5

Performance Data

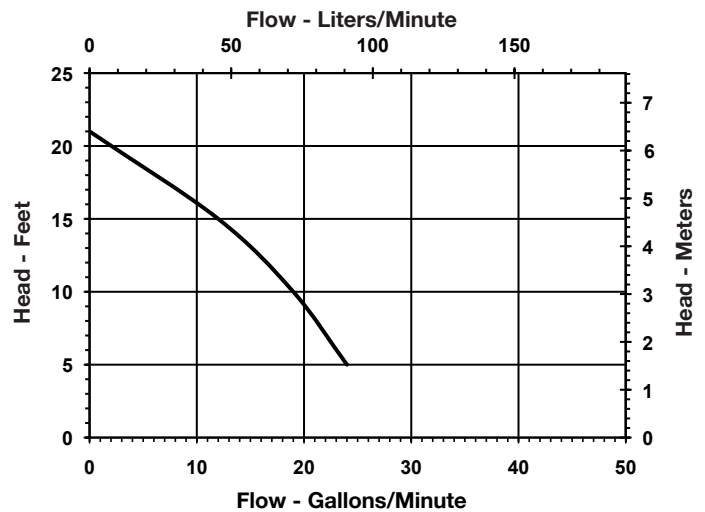

Franklin Electric

P.O. Box 12010
Oklahoma City, OK 73157-2010
Phone: 1.800.701.7894
Fax: 1.800.678.7867
www.LittleGiantPump.com



©2011 Franklin Electric Co., Inc.
Little Giant® is a registered trademark of Franklin Electric Co., Inc.
Form 996166 — 05/11