

Wastewater

SP33A Series



Applications


- Automatic utility pump ideal for dewatering and water transfer.

Features

- 1/3 hp, 115 Volt, thermal overload protected; 3.5 full load Amps; continuous duty "oil free" motor
- Pump casing fully constructed of durable reinforced thermoplastic for excellent corrosion resistance
- Stainless steel motor housing improves heat dissipation for longer motor life
- Stainless steel heat treated shaft
- 1 1/4" NPT discharge for ease of installation
- Non clogging design impeller constructed of durable reinforced thermoplastic
- Permanently lubricated lip seal
- Built-in suction strainer to eliminate internal damage from possible debris. Removable filter screen for easy cleaning
- 1/4" solids handling capability
- Automatic, mechanical float switch
 - On level 11.8" [300mm]
 - Off level 5.9" [150mm]
- 10' power cord

LittleGIANT®

Engineering Data

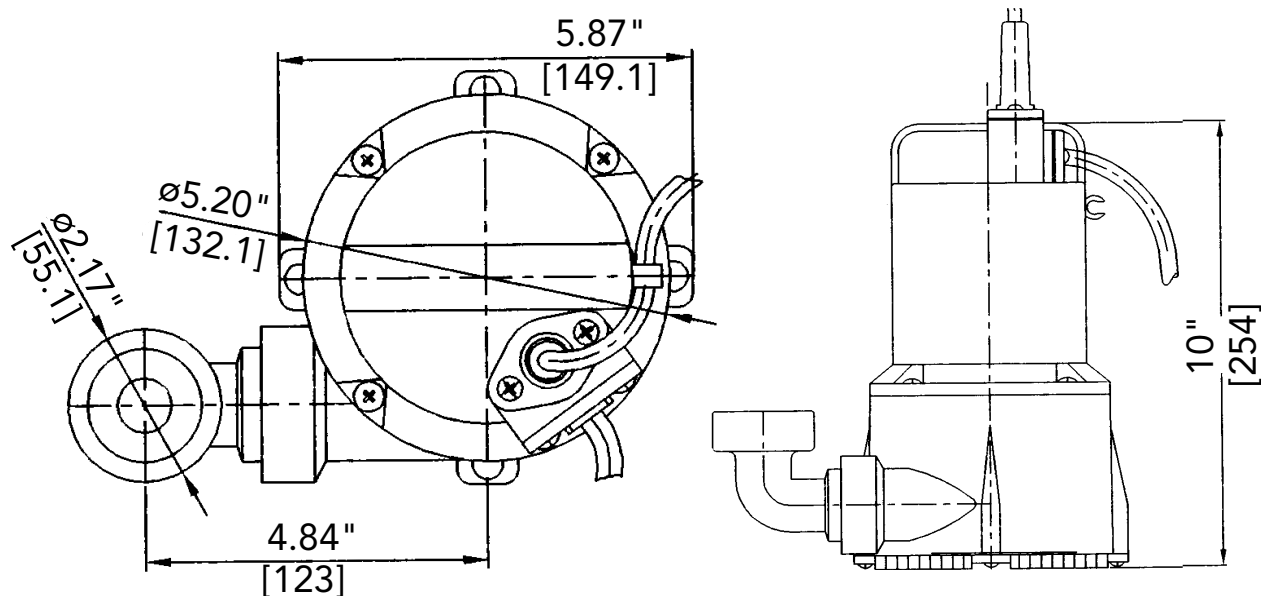


*Dimensions measured in inches [mm]

Specifications

Item No.	Model No.	Listing	HP	Volts	Discharge	Performance (gpm @ head)			Shut-Off Head (ft)	Cord Length (ft)	Ship Wt. (lbs)
						5'	10'	15'			
620135	SP33A	cCSAus	1/3	115	1-1/4"	30	23	15	23	10	10

Performance Data

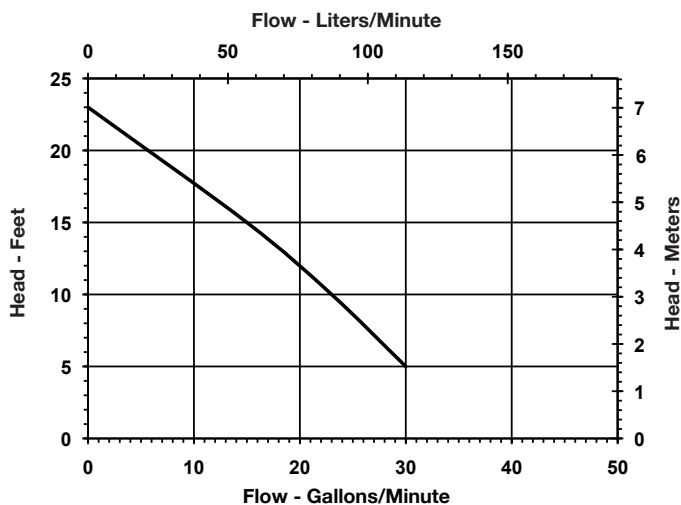

Franklin Electric

P.O. Box 12010
Oklahoma City, OK 73157-2010
Phone: 1.800.701.7894
Fax: 1.800.678.7867
www.LittleGiantPump.com



©2011 Franklin Electric Co., Inc.
Little Giant® is a registered trademark of Franklin Electric Co., Inc.
Form 996169 — 05/11