

Utility Pumps

UP16 SERIES 1/6 HP



Applications

- Commercial, industrial and home dewatering and water transfer uses

Features

- 1/6 hp oil-filled motor with overload protection
- Designed for continuous duty
- Pumps down to 1/4"
- Garden hose adapter
- Removable filter screen for easy cleaning
- Corrosion-resistant aluminum housing
- Stainless steel heat treated shaft

Series Specifications

Capacity: 20 gpm @ 4' (75 lpm @ 1.5m)

Shut Off: 19' (5.79 m)

Liquid Temp: 120 °F (49 °C)


Discharge: 3/4" NPT

Impeller: Glass reinforced thermoplastic

Electrical: 115 V, 60 Hz

Operation: Manual

Performance Curve

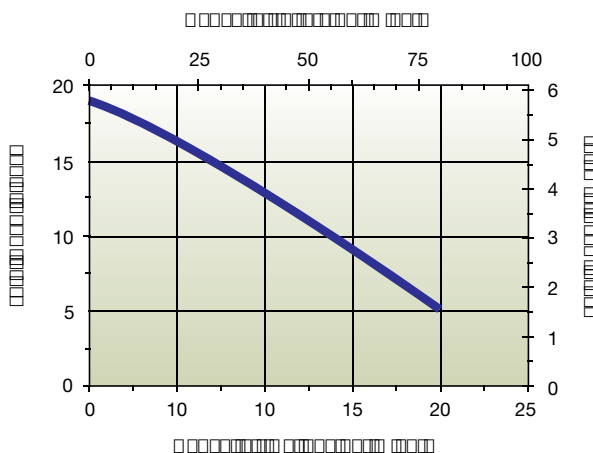

Model Characteristics

Item #	Model	Volts	Cord	Listing
620137	UP16M	115	10' 3 m	cCSAus