DATA SHEET

♦ Uni-Dose

Uni-Dose® Series UD Chemical Metering Pump

Universal Solution

Introducing the universal Uni-Dose® Series UD chemical metering pump, engineered to address common well water treatment requirements. This single model does it all at an affordable price. Its simplified design makes it easier than ever to install, maintain, and operate. Water treatment accuracy has never been easier!

Versatile & Flexible

A single speed control knob provides easy, accurate adjustment over the entire operating range. Precise capacity control from 1 to 24 gallons per day (4 to 90 LPD) at 80 psi (5.5 bar), with speeds up to 160 SPM. A full range of performance, delivered by a single pump model.

Quiet & Convenient

The advanced noise reduction design makes the UD pump ideal for residential water conditioning applications. The new integrated FastPrime™ priming valve allows for fast and easy start-up.

Durable & Reliable

Totally enclosed NEMA 4X/ IP65 housing provides superior protection in either indoor or outdoor installations with UV and heat resistance to 122°F (50°C). A universal 115-230V, 50/60Hz power supply with internal varistor and fuse protect the unit from power surge damage. Uni-Dose® is built to last.

Performance Specifications

Technical Data

Output Range	1-24 GPD (0.16-3.8 LPH)				
Pressure Range	80 PSI (5.5 Bar)				
Flow Rate Control	Variable speed, Fixed stroke				
Min Stroke	1 SPM				
Max Stroke	160 SPM				
Electric Supply	115-230V, 50/60 Hz				
Max Current @ 120 VAC	0.3 amps				
Installation	Indoor/Outdoor				
NEMA/IP Rating	NEMA 4X/IP65				
Certifications	NSF 61, UL				
Suction/Discharge	Single cartridge check valve				

Output Information

Model	Gallons per Day		Gallons per Hour		Liters per Day		Liters per Hour		mL/cc per Min	
UD	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
עט	1.0	24.0	0.04	1.0	3.79	90.85	0.16	3.80	2.70	63.0


Configuration Data Model UD001-238NU


UD00	Uni-Dose Series			
1* 115-230V 50/60HZ, USA 120V Plug				
238 PVC Head & fittings with PTFE LIQUIFRAM™				
NU	UV resistant inch tubing			


^{* 220-240}V USA Plug available upon request



Included Accessories

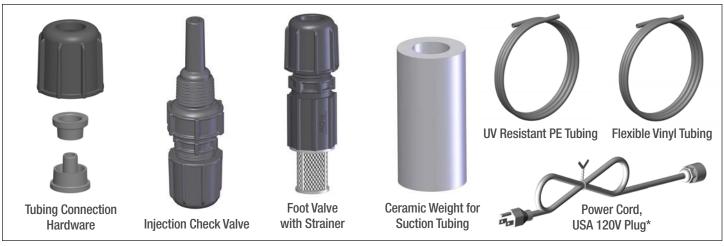

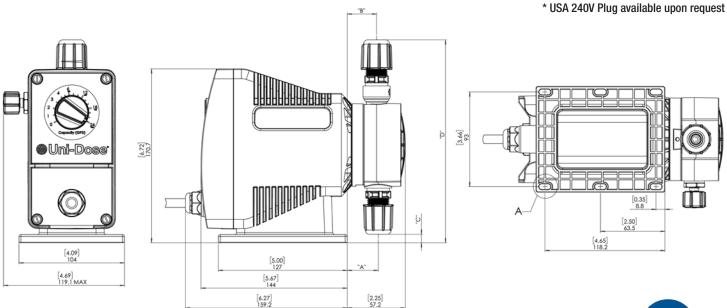



Dimensions

	Liquid End	"A"		"B"		"C"		"D"	
	Model	INCH	MM	INCH	MM	INCH	MM	INCH	MM
	LE-238NU	1.2	30.5	1.13	28.8	0.33	8.3	7.83	199







Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands— including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are committed to a world of sustainable progress and enduring results.

FastPrime is a trademark of Milton Roy, LLC Liquifram is a trademark of Milton Roy, LLC Uni-Dose is a registered trademark of Milton Roy, LLC Contact your local representative to find out more about Uni-Dose® Chemical Metering Pumps

unidosepumps.com



